



LOURDES A. LEON GUERRERO
GOVERNOR (MAGA'HAGA)

JOSHUA F. TENORIO
LIEUTENANT GOVERNOR
(SIGUNDO MAGA'HAGA)

DEPARTMENT OF ADMINISTRATION

GENERAL SERVICES AGENCY

AHENSAN SETBISION HINIRAT
148 ROUTE 1 SOUTH MARINE CORPS DRIVE, PITI, GU 96915
TELEPHONE: (671) 475-1707/1708
FAX: (671) 472-4217/1727
EMAIL: GSAPROUREMENT@GSADOA.GUAM.GOV
WEBSITE: WWW.GSA.DOA.GUAM.GOV



EDWARD M. BIRN
DIRECTOR (DIREKTOT)

BERNADINE C. GINES
DEPUTY DIRECTOR
(SIGUNDO DIREKTOT)

August 4, 2022

GSA-081-22

Structural Firefighting Pumpers with Minimum 1000 GPM Pump, Minimum 500 Gallon Water Tank, and 5-Year Extended Service/Maintenance Agreement

Guam Fire Department

Questions and Concerns received from Monster Auto Corp dba Guam Auto Spot on July 22, 2022

Question 1:

What is the emissions requirement for the engine and what is the available fuel for these trucks? We need to make sure we are providing the accurate engine on both the custom and commercial chassis.

Response:

We request a Diesel powered engine, compatible with the grade of diesel fuel offered on island.

EPA is responsible for determining the Emergency Vehicle standards that are to be followed. The EPA also has provisions regarding the engine manufacturers' ability to request specific emission controls or settings, approved as Auxiliary Emission Control Devices (AECDs) for new engines, and Emergency Vehicle Field Modifications (EVFMs) for in-use engines that are installed in ambulances and fire trucks.

Question 2:

Will an engine compression brake be acceptable in place of an exhaust brake?

Response:

Yes.

Question 3:

Will USB's in place of CD's be acceptable for manuals?

Response:

Yes.

Question 4:

Per NFPA, no white flashing warning lights shall face the rear of the truck, will a lightbar with side and forward facing red or white modules and no rear facing modules be acceptable which meets NFPA?

Response:

Yes.

Question 5:

The Hard Suction Hose section calls for 6" hard suction hose with 6" rocker male lugs on the ends, the, 1,000 GPM pump only requires 5" main inlets for the main pump per NFPA. Will 5" hard suction hose with 5" rocker male lugs be acceptable or does the pump require 6" main inlets? If 5" main inlets are used with 5" hard suction hose then the change will also modify the loose equipment required for 6" NH x 5" Storz adapters which will not be needed. Would having the hard suction hose with 5" Storz provided on the ends be acceptable then?

Response:

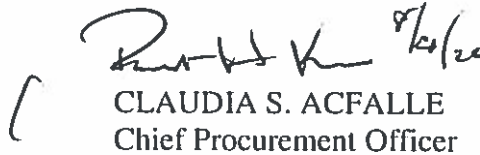
We will accept a 6" hard suction hose with a 5" – 6" Storz adapter to connect to the 5" main intake.

Question 6:

For the deck gun option, should the deck gun monitor and nozzle be electric controlled or manual controlled?

Response:

Either would be acceptable.


CLAUDIA S. ACFALLE
Chief Procurement Officer

Please Print

Acknowledgement Copy (Re-Fax to GSA)

Received By: _____

Date: _____

Company Name: _____

Fax to: 475-1727 or 472-4217

Email to: gsaprocurement@gsa.gov